


**Green Pin Standard Dee Shackles with Safety Nut and Bolt Pin - G-4153**

- Grade 6 high tensile steel, quenched and tempered.
- Minimum breaking load is 6 times the W.L.L.
- Conforms to EN 13889 and meets the performance requirements of US Fed Spec RC-C-271 Type IVA class 2, Grade A.
- Hot dipped galvanised.
- Temperature range -20 ° C upto +200 ° C.
- Supplied with proof load certificate, material certificate available on request.
- DNV Type Approved product (see product support for the latest certificate).

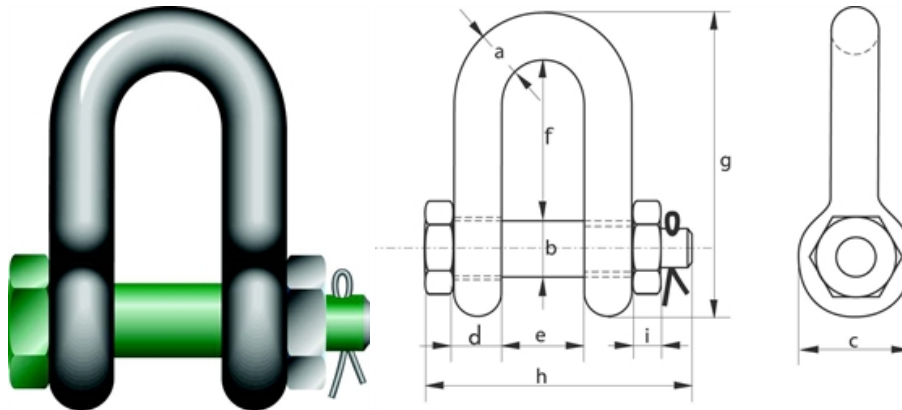

Code	W.L.L (tonnes)	a (mm)	b (mm)	c (mm)	d (mm)	e (mm)	f (mm)	g (mm)	h (mm)	i (mm)	Weight (kgs)
A0406	2	13.5	16	34	13.5	22	43	85	83	13	0.39
A0407	3.25	16	19	40	16	27	51	105	99	17	0.67
A0408	4.75	19	22	47	19	31	59	125	115	20	1.08
A0409	6.5	22	25	53	22	36	73	144	131	23	1.66
A0410	8.5	25	28	60	25	43	85	161	151	25	2.46
A0411	9.5	28	32	67	28	47	90	179	167	28	3.4
A0412	12	32	35	74	32	51	94	199	179	31	4.51
A0413	13.5	35	38	80	35	57	115	220	198	34	6.1
A0414	17	38	42	89	38	60	127	239	202	19	7.63
A0415	25	45	50	104	45	74	149	283	244	24	13.25
A0416	35	50	57	111	50	83	171	333	270	27	18.53
A0430	42.5	57	65	134	57	95	190	360	302	30	25.94
A0417	55	65	70	145	65	105	203	399	330	33	35.33
A0418	85	75	83	163	75	127	229	455	376	40	52.97