


## Green Pin Standard Dee Shackles with Screw Collar Pin - G-4151

- Grade 6 high tensile steel, quenched and tempered.
- Minimum breaking load is 6 times the W.L.L.
- Conforms to EN 13889 and meets the performance requirements of US Fed Spec RC-C-271 Type IVA class 2, Grade A.
- Hot dipped galvanised.
- Temperature range -20 ° C upto +200 ° C.
- Supplied with proof load certificate, material certificate available on request.
- DNV Type Approved product (see product support for the latest certificate).

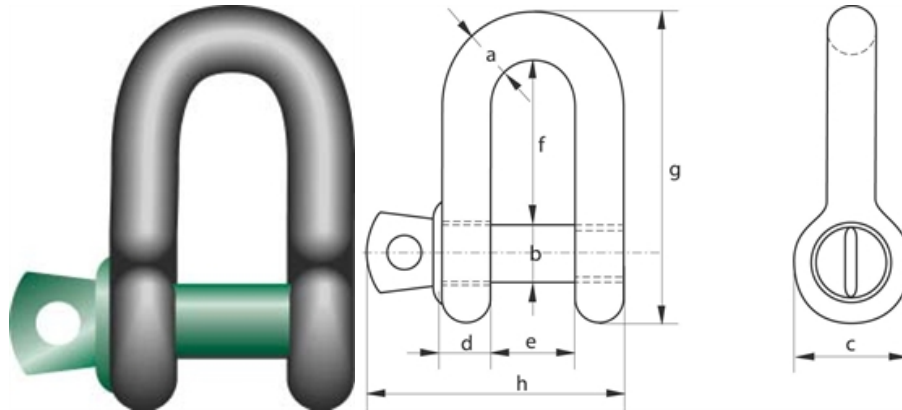

Code	W.L.L tonnes	a (mm)	b (mm)	c (mm)	d (mm)	e (mm)	f (mm)	g (mm)	h (mm)	Weight kgs
A0201	0.33	5	6	12.5	5	9.5	19	38	31	0.02
A0202	0.5	7	8	17	7	12	22	47	40	0.05
A0203	0.75	9	10	21	9	13.5	26	56	49	0.09
A0204	1	10	11	23	10	17	32	66	56	0.14
A0205	1.5	11	13	26	11	19	37	74	68	0.19
A0206	2	13.5	16	34	13.5	22	43	85	76	0.32
A0207	3.25	16	19	40	16	27	51	105	93	0.54
A0208	4.75	19	22	47	19	31	59	125	107	0.87
A0209	6.5	22	25	53	22	36	73	144	123	1.34
A0210	8.5	25	28	60	25	43	86	161	141	2.08
A0211	9.5	28	32	67	28	47	90	179	158	2.77
A0212	12	32	36	74	32	51	94	199	176	3.72
A0213	13.5	35	38	80	35	57	115	220	192	5.14
A0214	17	38	42	89	38	60	127	239	208	6.85
A0215	25	45	50	104	45	74	149	283	250	11.45
A0216	35	50	57	111	50	83	171	333	281	16.86
~	42.5	57	65	134	57	95	190	360	321	24.61
A0217	55	65	70	145	65	105	203	399	355	32.65